


Deutsche  
Qualität  
Garantiert

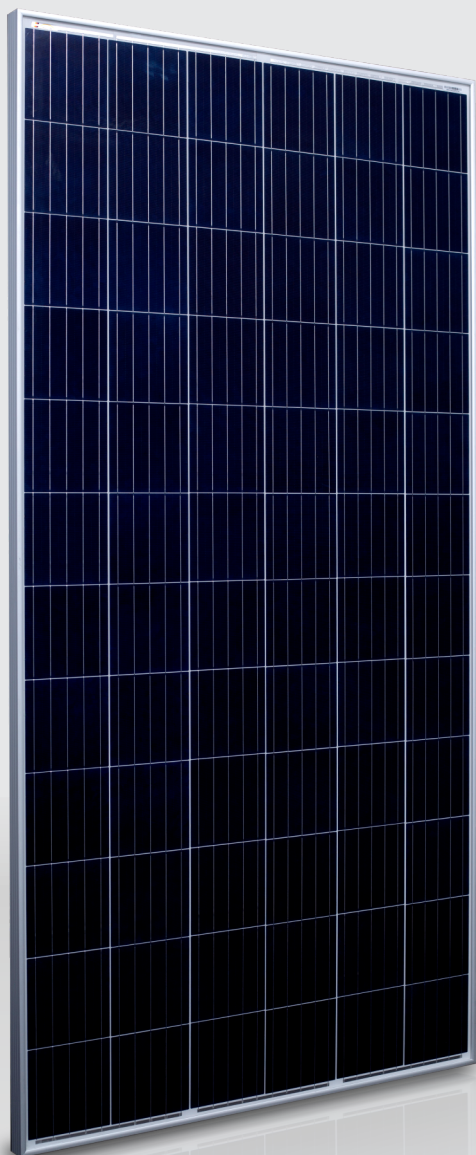

# POWER PLUS

30  
years  
Performance  
Guarantee

15  
years  
Product  
Warranty

30  
years  
Performance  
Guarantee

15  
years  
Product  
Warranty

POLY-CRYSTALLINE PV MODULES  
FULL CELLS • MONO-FACIAL

**330W-345W**  
AE P6-72 Series

### Mechanical and design specification




Cell type	Poly-Si PERC, Full cells, 156.75 mm
No. of cells	72
Glass	3,2 mm, high transmission, AR coated, tempered
Encapsulation	EVA
Back cover	White Backsheet
Junction box	IP 68 rated
Frame	35 mm anodized Aluminium alloy
Cable	1 x 4 mm <sup>2</sup> , 1200 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	1956 mm x 992 mm x 35 mm
Weight	20 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Wind load	2400 Pa/ 244 kg/ m <sup>2</sup>
Mechanical load	5400 Pa/ 550 kg/ m <sup>2</sup>

### Packaging information

Packaging configuration	66 pcs / double pallet
Loading capacity	792 pcs / 40 HQ
Size / Pallet	1985 mm x 1140 mm x 2390 mm
Weight	1440 kg / double pallets

### Temperature ratings

Operating temperature (°C)	-40 to +85
Temp.coefficient of P <sub>max</sub> (%/°C)	-0.40
Temp.coefficient of V <sub>oc</sub> (%/°C)	-0.31
Temp.coefficient of I <sub>sc</sub> (%/°C)	0.053
Nom. operating temp. NOCT (°C)	45 ± 2

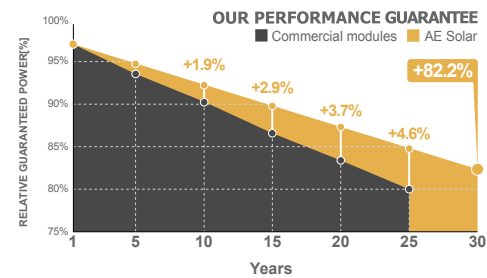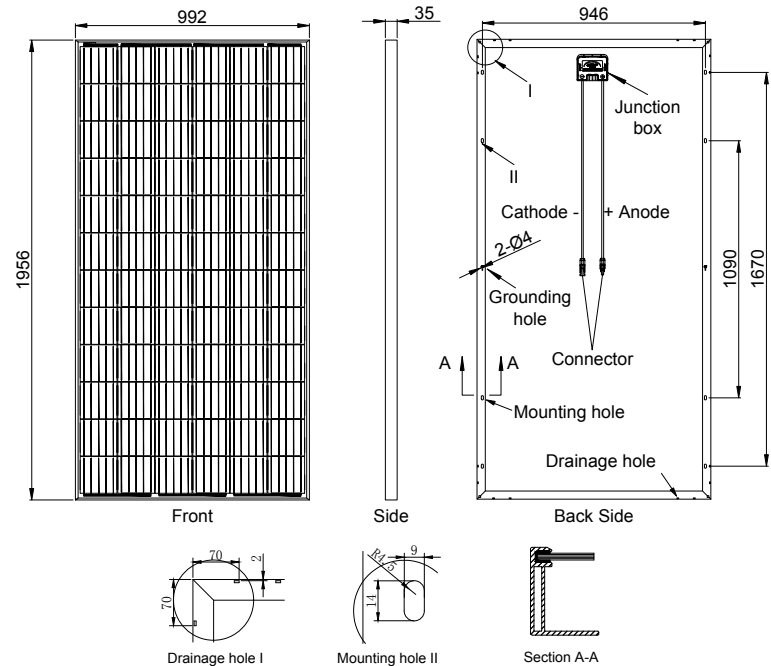

Electrical specifications (STC*):		AE330P6-72	AE335P6-72	AE340P6-72	AE345P6-72
Nominal Max. Power	P <sub>max</sub> (Wp)	330	335	340	345
Maximum operating voltage	V <sub>MPP</sub> (V)	36.97	37.05	37.09	37.14
Maximum operating current	I <sub>MPP</sub> (A)	8.93	9.04	9.17	9.29
Open-circuit voltage	V <sub>oc</sub> (V)	45.89	45.93	45.97	46.03
Short-circuit current	I <sub>sc</sub> (A)	9.37	9.41	9.44	9.61
Module efficiency	η (%)	17.01	17.26	17.52	17.78
Power tolerance	(W)	0~+5			
Maximum system Voltage	(V)	1500			
Maximum series fuse rating	(A)	15			

\*STC: Standard test conditions (Irradiance 1000 W/m<sup>2</sup>, Cell temperature 25°C and air mass of AM1.5)

Electrical specifications (NMOT*):		AE330P6-72	AE335P6-72	AE340P6-72	AE345P6-72
Nominal Max. Power	P <sub>max</sub> (Wp)	250	254	258	262
Maximum operating voltage	V <sub>MPP</sub> (V)	35.12	35.20	35.24	35.28
Maximum operating current	I <sub>MPP</sub> (A)	7.14	7.23	7.33	7.43
Open-circuit voltage	V <sub>oc</sub> (V)	43.60	43.63	43.67	43.73
Short-circuit current	I <sub>sc</sub> (A)	7.50	7.53	7.55	7.69

\*NMOT: Normal Module Operating Temperature (Irradiance 800 W/m<sup>2</sup>, Ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.