
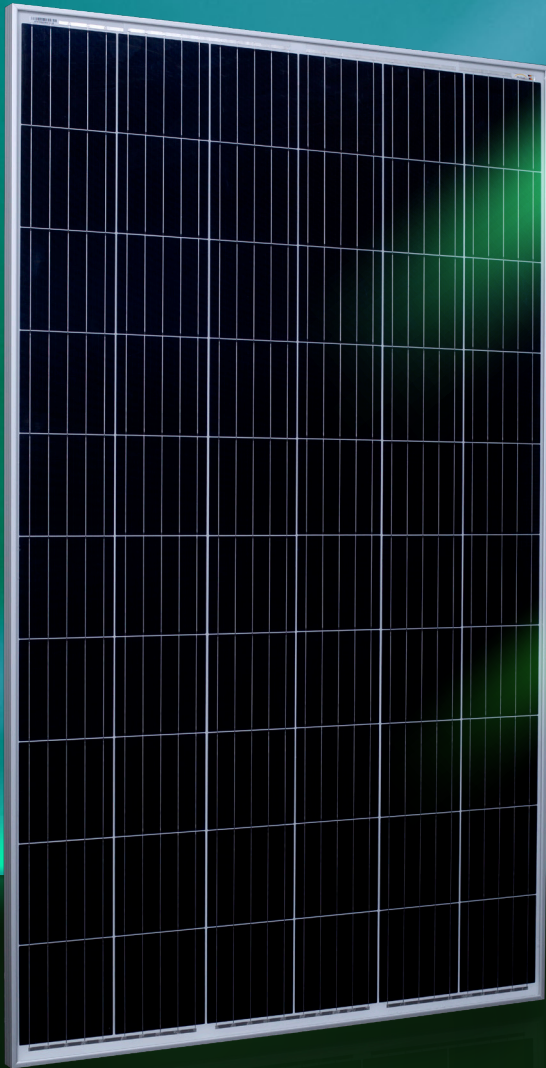
 Deutsche
 Qualität
 Garantiert



60
FULL
CELLS

PID
RESISTANT

SALT CORROSION
RESISTANT

SAND
RESISTANT

NH₃
S
AMMONIA
RESISTANT

HIGHLY STABLE
AND TOUGH

AURORA

HIGH ENERGY YIELD
RELIABILITY
DURABILITY

30

years
Performance
Guarantee

15

years
Product
Warranty

MONO-CRYSTALLINE PV MODULES
FULL CELLS • MONO-FACIAL


325W-335W

AE MB-60 Series



IEC 61215
IEC 61730
Regular Production Surveillance
Type Tested and Monitored


IEC 62716 (Ammonia corrosion)
IEC 61701 (Salt mist corrosion)
IEC 60068 (Sand and dust)
IEC 62804 (PID resistance)



www.ae-solar.com

Mechanical and design specification

Cell type	Mono c-Si PERC, Full cells, 158.75 mm
No. of cells	60
Glass	3.2 mm, high transmission, AR coated, tempered
Encapsulation	EVA
Back cover	White backsheet
Junction box	IP 68 rated
Frame	35 mm anodized Aluminium alloy
Cable	1 x 4 mm ² , 350 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	1665 mm x 996 mm x 35 mm
Weight	18.5 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Wind load	2400 Pa/ 244 kg/ m ²
Mechanical load	5400 Pa/ 550 kg/ m ²





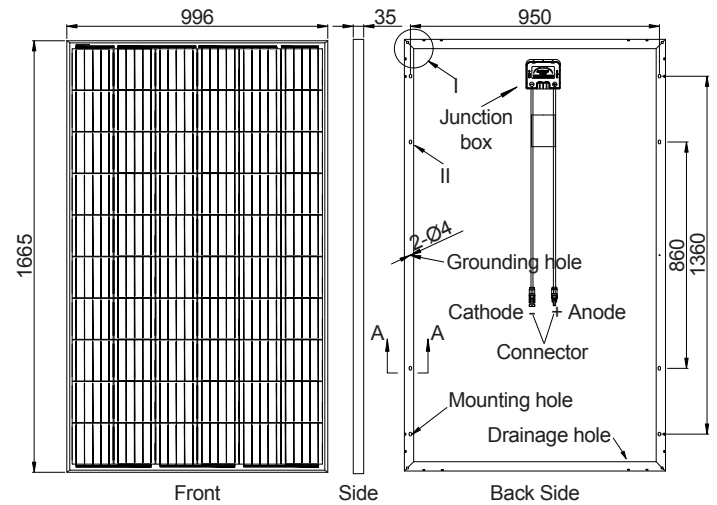


Packaging information

Packaging configuration	66 pcs / double pallet
Loading capacity	924 pcs / 40 HQ
Size / Pallet	1695 mm x 1140 mm x 2395 mm
Weight	1322 kg / double pallets

Temperature ratings

Operating temperature (°C)	-40 to +85
Temp. coefficient of P_{max} (%/°C)	-0.370
Temp. coefficient of V_{oc} (%/°C)	-0.280
Temp. coefficient of I_{sc} (%/°C)	0.048
Nom. operating temp. NOCT (°C)	45 ± 2

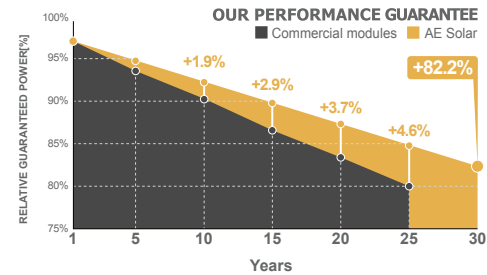

Electrical specifications (STC*):		AE325MB-60	AE330MB-60	AE335MB-60
Nominal Max. Power	P_{max} (Wp)	325	330	335
Maximum operating voltage	V_{MPP} (V)	33.61	33.81	34.02
Maximum operating current	I_{MPP} (A)	9.68	9.76	9.85
Open-circuit voltage	V_{oc} (V)	41.10	41.31	41.49
Short-circuit current	I_{sc} (A)	10.20	10.37	10.38
Module efficiency	η (%)	19.60	19.90	20.20
Power tolerance	(W)		0~+5	
Maximum system Voltage	(V)		1500	
Maximum series fuse rating	(A)		15	

*STC: Standard test conditions (Irradiance 1000 W/m², Cell temperature 25°C and air mass of AM1.5)

Electrical specifications (NMOT*):		AE325MB-60	AE330MB-60	AE335MB-60
Nominal Max. Power	P_{max} (Wp)	245	248	252
Maximum operating voltage	V_{MPP} (V)	31.60	31.80	32.00
Maximum operating current	I_{MPP} (A)	7.74	7.81	7.88
Open-circuit voltage	V_{oc} (V)	37.90	38.10	38.30
Short-circuit current	I_{sc} (A)	8.16	8.30	8.39

*NMOT: Normal Module Operating Temperature (Irradiance 800 W/m², Ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.